


CODE: **RS4288GD** v1.1/II EN**
 NAME: **RACK cabinet, floor standing, ready-to-assemble 42U/800x800**

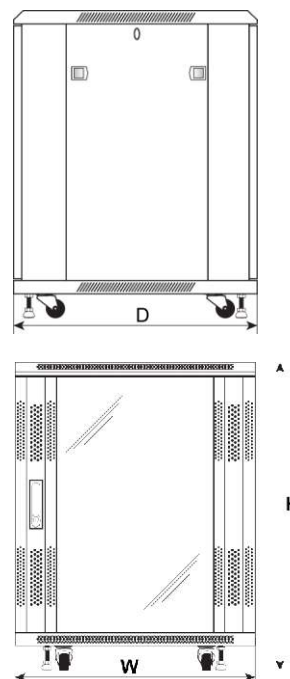

APPLICATION

The RACK 19" cabinet enables integration of the CCTV, KD, SSWiN, RTV, and LAN systems in medium and large companies. It is designed for mounting of devices in a 19" enclosures. The RACK cabinets ensure an aesthetic mounting of devices and protect them from mechanical damage.

TECHNICAL DATA

Mounting dimensions:	W=19", H=42U
External dimensions:	W=800, H=2055, D=800 [mm, +/-2]
Gross/net weight:	122,5 / 132,5 [kg]
Construction:	<ul style="list-style-type: none"> - RACK profiles: cold rolled steel SPCC 2mm RAL 9004 - screwed - transverse profiles: cold rolled steel SPCC 1,5mm RAL 9004 - screwed - cabinet frame: cold rolled steel SPCC 1,2mm RAL 9004 - welded - front door: 5mm tempered glass / SPCC 1,2mm RAL 9004 - hinged - side door: cold rolled steel SPCC 1,2mm RAL 9004 - latched - rear door: cold rolled steel SPCC 1,2mm RAL 9004 - hinged
Static load:	800 kg (with leveling legs)
Application:	indoor, IP20
Notes:	<ul style="list-style-type: none"> - the possibility to change the spacing between the front and rear RACK profiles - ventilation holes in the top and bottom plate of the cabinet and in the front door - the possibility of mounting a panel of fans to the upper plate - RAWP (max. 2 pieces.) - cable glands in the bottom and top plate of the cabinet - two vertical cable organizers mounted in front of the cabinet - the set includes 4 wheels without locking, 4 leveling legs - the possibility of mounting the plinth with a height of 100mm - RAC188 - front door locked with a key (two included) - rear door locked with a key (two included) - side door - the possibility of mounting a lock - RAZB16 - cabinet for assembling
Certificates, declarations:	RoHS